



## Microbee Power / Video / Cassette interface cable

### Instructions for assembly




#### Kit Contents:

- 1 x 5 pin din to 4 x RCA lead
- 1 x 2.5mmID DC plug
- 1 x 3.5mm Black plug
- 1 x 3.5mm Red plug

Three connectors from the existing cable get replaced with the supplied plugs.

Refer to the photo to the left which shows which plugs replace the ones on the cable.

The white RCA remains and becomes the Video out.

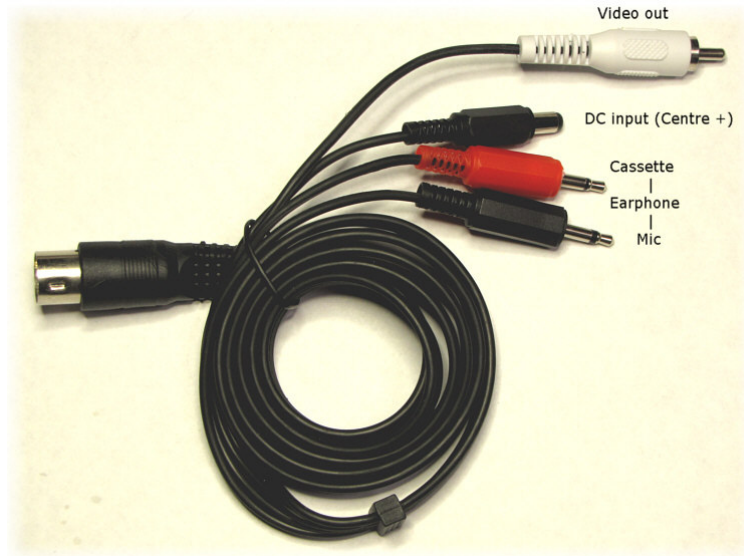

When removing the Yellow, Red & Black RCA connectors you will see that the inner insulator is coloured white, red & black respectively. The inner conductor of each gets connected to the centre pin of each plug. The outer shield wire is connected to the outer of each plug.

When finished, your new cable should look like the one in the photo to the left.